

ProcessMate TC100 Temperature Controller System

Designed to maintain consistent fluid temperature control



The ProcessMate TC100 is a complete system that maintains a consistent fluid temperature for precise, repeatable dispensing control.

The ProcessMate™ TC100 system maintains consistent fluid temperatures for precise, repeatable dispensing control. The complete TC100 system includes a temperature controller and syringe barrel heater that are designed for use with 30cc Unity™ HiTemp™ syringe barrels.

A constant fluid temperature is essential for maintaining consistent fluid viscosity, which delivers more repeatable dispensing results. The TC100 system reduces the fluid viscosity to maintain optimal dispensing performance. The system integrates seamlessly with Nordson EFD fluid dispensers, which actuate the dispense cycle.

Features

- Complete system that includes an aluminum barrel retainer, heater sleeve, and controller
- Controls temperatures up to 100° C (212° F)
- Barrel heater can be installed onto automated dispensing systems or stand mounted for benchtop applications

Benefits

- Barrel heater keeps fluids above ambient temperatures to maintain uniform viscosity
- Provides a reliable method for reducing viscosity of non-newtonian, non-heat curing, or snap curing fluids to reduce cycle time
- Easy integration with automation makes it ideal for high volume production
- Maintains dispensing temperatures within $\pm 1.0^\circ$ C for better process control

Part #	Description	Qty
7364017	ProcessMate TC100 Controller System	1
7015479	30cc Neoprene Piston	20

System includes one box of Unity barrels and neoprene pistons.

Refer to the Unity HiTemp data sheet for syringe part numbers:
www.nordsonefd.com/UnityHiTempBarrels

Order your EFD dispenser separately:
www.nordsonefd.com/dispensers



more info



Specifications


ProcessMate TC100 Temperature Controller

Item	Specification
Cabinet size	215W x 84H x 157D mm (8W x 3H x 6D")
Weight	1.3 kg (2.9 lb)
Input AC (to power supply)	100–240 VAC, ±10%, 50/60Hz, 20 Amp maximum
Output DC (from power supply)	24 VDC, 2 Amp maximum
Temperature control	Ambient 20–100° C (68–212° F)
Temperature accuracy	±1.0° C (±1.8° F)

Barrel Heater Assembly

Item	Specification
Size	57W x 157H x 2.8D mm (2W x 6H x 6D") (with mounting bracket, without dispensing tip)
Weight	Syringe barrel retainer: 0.4 kg (0.8 lb) Heater sleeve: 0.3 kg (0.6 lb)

Typical Automated Dispensing System Installation

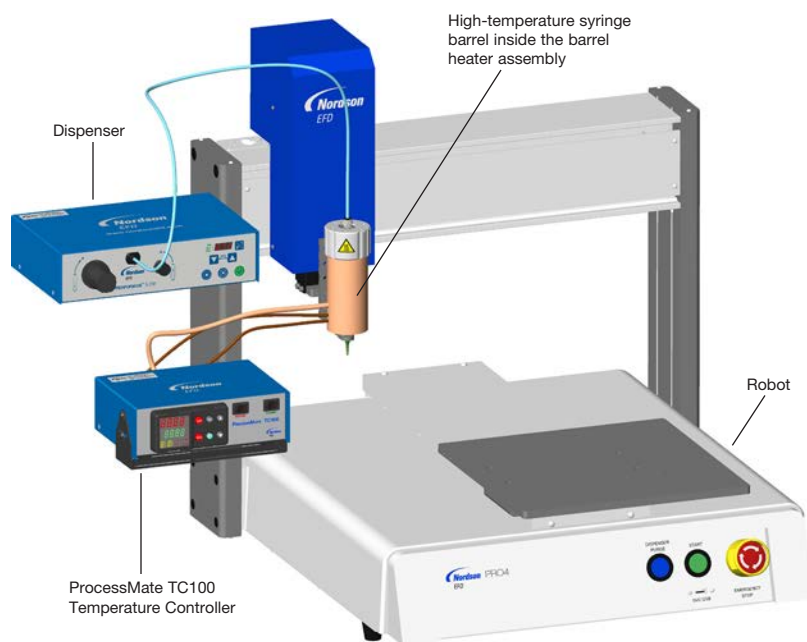

Request a Process Evaluation

Contact Nordson EFD to configure a precision dispense system that meets your specific needs, with:

- A complimentary process evaluation by experienced fluid dispensing experts.
- Samples processed for customer evaluation and approval prior to purchase.



For Nordson EFD sales and service in over 40 countries, contact Nordson EFD or go to www.nordsonefd.com.

Global

East Providence, RI USA
800-556-3484; +1-401-431-7000
info@nordsonefd.com

Europe

Dunstable, Bedfordshire, UK
0800 585733; +44 (0) 1582 666334
europe@nordsonefd.com

Asia

China: +86 (21) 3866 9006; china@nordsonefd.com
India: +91 80 4021 3600; india@nordsonefd.com
Japan: +81 03 5762 2760; japan@nordsonefd.com
Korea: +82-31-736-8321; korea@nordsonefd.com
SEAsia: +65 6796 9522; sin-mal@nordsonefd.com